



CONCRETE WALK SECTION DETAIL

N.T.S.
 NOTE:
 1. THE SIDEWALK SHALL BE PROVIDED WITH CONTROL JOINTS AT EVERY 5 FEET AND EXPANSION JOINTS AT EVERY 25 FEET. EXPANSION JOINTS SHALL CONSIST OF PRE-MOLDED BITUMINOUS MATERIAL.
 2. THE CONCRETE THICKNESS AT DRIVEWAY CROSSINGS SHALL BE 6" MINIMUM

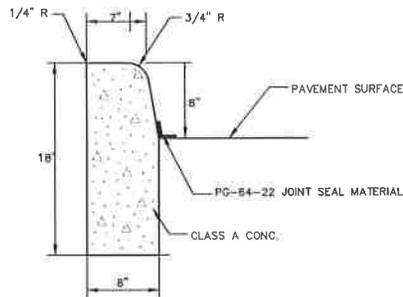

CONCRETE CURB DETAIL

N.T.S.
 NOTE:
 1. REFER TO PENNDOT RC-64M, LATEST EDITION.
 2. PROVIDE MATERIALS AND CONSTRUCTION MEETING THE REQUIREMENTS OF PUBLICATION 408.

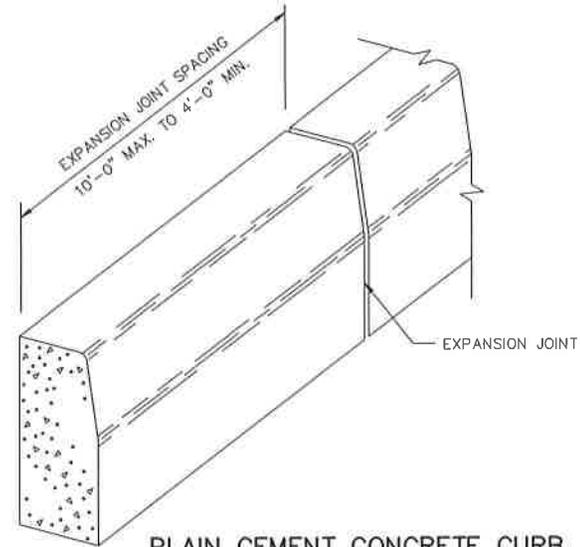


PLAIN CEMENT CONCRETE CURB

NOT TO SCALE

NOTES:

- CURBING SHALL BE BUILT IN 10' LENGTHS AND AN APPROVED EXPANSION JOINT OF 1/2" MIN. THICKNESS FILLED WITH PREFORMED BITUMINOUS EXPANSION JOINT FILLER MATERIAL INSTALLED FLUSH WITH TOP AND FACE OF CURB SHALL BE USED AT EACH JOINT.
- ALL CONSTRUCTION AND MATERIALS TO BE IN CONFORMANCE WITH PENNDOT FORM 402.

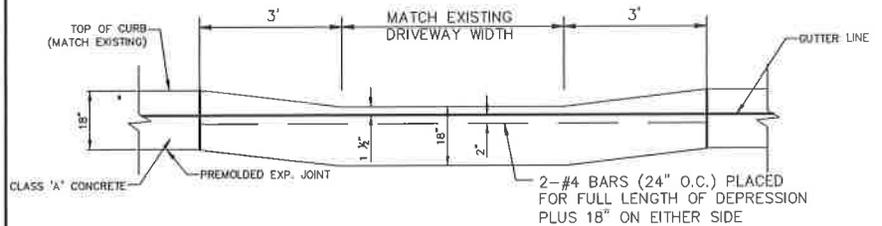

CURB DEPRESSION AT DRIVEWAY

NOT TO SCALE



SIDEWALK & CURB DETAILS

BOROUGH OF TRAPPE
 MONTGOMERY COUNTY, PA

| | |
|-------------|------------|
| JOB NUMBER: | 340218.000 |
| DATE: | 12/21/18 |
| SCALE: | NTS |
| DRAWN BY: | GBC |
| SHEET: | DE-1 |